

Reference

LAMILUX CI System Continuous Rooflight



Toom construction and garden center, Langen

Essential Info

Place / Country:	Langen, Germany
Year:	2014
Building type:	Toom construction and garden center
Solutions:	Continuous Rooflight B

Delivery and assembly of seven continuous rooflights with integrated smoke and heat exhaust systems including permanent fall-through protection.

- Continuous Rooflight B without thermal bridges
- Glazing with multi-shell hollow-chamber profile (10 mm – fourfold + 6 mm four-fold) in an opal, glare-free execution
- SHEV System with opener for additional ventilation function
- LAMILUX Safety Stripes for Continuous Rooflight B:
- The aluminium safety stripes in distance of 250 mm in the area of the safety edge of the continuous rooflight guarantee a permanent fall-through protection according to GS-Bau-18 already before assembling the glazing and during the whole time of the product use.


LAMILUX HEINRICH STRUNZ GMBH

POB 1540 - 95105 Rehau/Germany - Phone: +49 (0)9283/595-0 - Fax: +49 (0)9283/595-290

E-Mail: information@lamilux.com - www.lamilux.com

Reference

LAMILUX CI System Continuous Rooflight

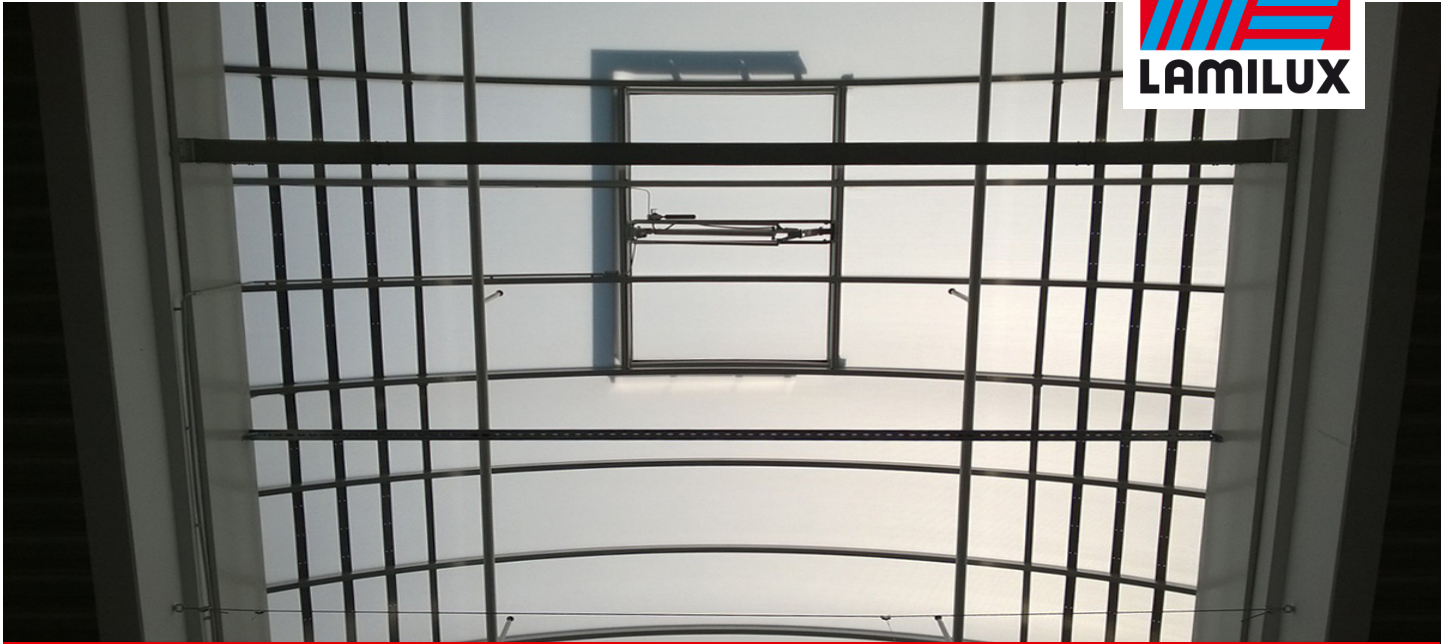

Toom construction and garden center, Langen



LAMILUX HEINRICH STRUNZ GMBH

POB 1540 - 95105 Rehau/Germany - Phone: +49 (0)9283/595-0 - Fax: +49 (0)9283/595-290

E-Mail: information@lamilux.com - www.lamilux.com